


## Model 1094B GPS Substation Clock

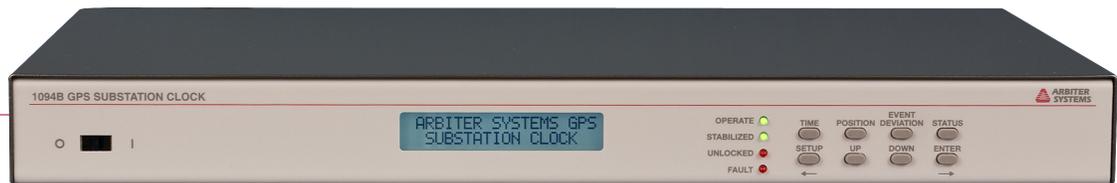

*Specifications subject to change without notice*


The Arbiter Systems®, Inc. Model 1094B GPS Substation Clock is a GPS timing source for substations which includes as standard the most common configuration options found in our other models. The Model 1094B with 250 ns (typical < 100 ns) worst-case accuracy meets the most demanding substation requirements, including synchrophasors. The Model 1094B has 4 LEDs to monitor operating status, a 2 x 20 character LCD setup/status display and a keyboard. The Model 1094B also comes equipped with a front panel screwdriver-slot power switch and white LED backlight.

The four outputs, with both BNC and 5 mm pluggable terminal strip connectors connected in parallel, are configurable to high-drive 5 Vdc (250 mA at > 4 V); IRIG-B12x modulated; or 300 volt open drain MOSFET signals. The high-drive 5 Vdc signal and the MOSFET outputs are selectable to: IRIG-B00x level-shift, 1 PPS, or programmable pulse A or B functions. All of the outputs have substantial drive capability to easily drive multiple loads in parallel.

Standard features include a GPS Data Backup Battery, one Form C fail-safe relay, two serial communication ports and Event Capture capability. The GPS Data Backup Battery maintains the real-time clock, almanac and ephemeris data in the 12-channel GPS receiver to speed acquisition. Satellites are acquired in as little as 15 seconds after a brief power loss. One Form C (SPDT) fail-safe, relay is jumper selectable to Fault, Unlocked or Programmable Pulse functions and is compatible with 129 Vdc digital fault recorder inputs. Two RS-232 and RS-422/485 (transmit only) ports are available via two 9-pin D-subminiature connectors. The Event Capture records events triggered from the dedicated, optically isolated rear panel input or from either serial port receive line with 100 ns resolution.

Power options include 85 Vac to 264 Vac or 110 Vdc to 370 Vdc with an IEC-320 detachable cordset, 85 Vac to 250 Vac or 110 Vdc to 350 Vdc terminal strip inlet with surge withstand, or 10 Vdc to 60 Vdc terminal strip inlet with surge withstand. The terminal-strip versions have a surge-withstand network designed to meet ANSI/IEEE C37.90-1 and IEC801-4 specifications. All power configurations may be retrofitted in the field.

## Model 1094B Specifications

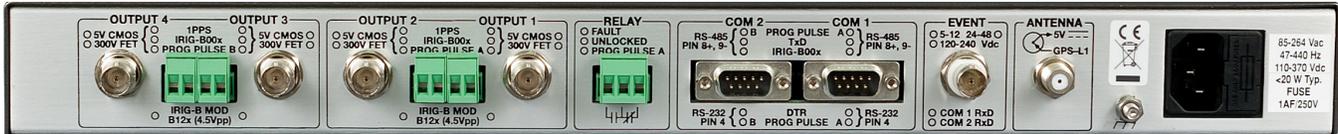

### Receiver Characteristics

#### Timing Accuracy

Specifications apply at the 1 PPS output, with US Department of Defense Selective Availability (SA) as of date of publication.

UTC/USNO  $\pm 250$  ns peak;  $< \pm 100$  ns typical (SA off)

#### Position Accuracy

10 meters, rms, 90 % confidence

#### Satellite Tracking

Twelve (12) channel, GPS-L1, C/A code (1575.42 MHz). Receiver simultaneously tracks up to twelve satellites.

#### Acquisition

150 seconds typical, cold start

15 minutes, 90 % confidence, cold start

40 seconds, typical, with almanac < 1 month old

15 seconds, typical, with ephemeris < 4 hours old

### I/O Configuration

#### Outputs

Four, each with BNC and 5 mm pluggable terminal strip in parallel. Jumper selectable to high-drive 5 Vdc (250 mA at > 4 V) selectable to: IRIG-B00x level-shift, 1 PPS, or Programmable Pulse A or B; IRIG-B12x modulated; or 300 volt MOSFET output. The MOSFET output is selectable to the same functions as the high drive 5 Vdc output. The MOSFET output is not electrically isolated from instrument common.

#### Event Input

One opto-isolated event capture input with 100 ns resolution, BNC connector jumper-configurable to 5 Vdc to 12 Vdc, 24 Vdc to 48 Vdc and 120 Vdc to 240 Vdc nominal input. Event input is also jumper-configurable to COM 1 and COM 2 RXD line.

#### Programmable Pulse Output

Two programmable pulse outputs, PPA and PPB. PPA is available (by a jumper connection) on outputs 1, 2 and COM 1 pin 4 (RS-232) and pins 8 & 9 (RS-485). PPB is available (by a jumper connection) on outputs 3, 4 and COM 2 pin 4 (RS-232) and pins 8 & 9 (RS-485).

Six modes:

- Every 1 s to 60,000 s, starts top of the minute
- Hourly at a specified offset
- Daily at a specified time of day
- One shot at a specified time of year
- 1 PPS to 1000 PPS squarewave (PPB only)
- Aux IRIG Mode (PPB only)

Pulse duration is programmable from 0.01 seconds to 600 seconds, except in one-shot mode, where the output is Low prior to the specified time and High thereafter.

#### Relay Contact

One, Form C (SPDT) fail-safe, 0.3 A at 130 Vdc; jumper selectable to Fault, Unlocked, or Programmable Pulse A (PPA) functions. Fail-safe means the relay indicates 'fault' or 'unlocked' condition with power off.

## Model 1094B Specifications

### Interface

#### Operator

Display	2 x 20 character supertwist LCD White LED backlight
Functions	Time: UTC or local Position: latitude, longitude, elevation Clock status 1 PPS (input) deviation Event time
Status LEDs	Operate (green) Stabilized (green) Unlocked (red) Fault (red)
Keyboard	Eight keys
Setup	Local time offset IRIG Setup: Local/UTC/1344 Daylight Saving Time: On/Off/Auto Backlight control: On/Off/Auto Event input: Event/1 PPS deviation Programmable Pulse setup Antenna Cable delay Out-of-lock time: 1 min. to 99 minutes, Off, or Zero Delay Auto-Survey Serial port: RS-232

#### System

RS-232	1200 baud to 38,400 baud; 7 or 8 data bits; 1 or 2 stop bits; even/odd/no parity 2 Male 9-pin D-sub, COM 1 and COM 2 (TXD, RXD, AUX IN, AUX OUT) Broadcast modes include ASCII, Extended ASCII, ASCII with Time Quality, and Vorne (output once every second), Status (output on change of Status) and Event (output on an Event)
RS-422/485	Transmit only, to drive multiple devices. Two outputs. Uses extra pins on COM 1 and COM 2.

### Power Requirements

#### Standard (Option 07)

Voltage	85 Vac to 264 Vac, 47 Hz to 440 Hz, 20 VA max. or 110 Vdc to 370 Vdc, 15W max.
Inlet	IEC-320 with fuse and mating cordset. Specify cordset P01-P10

### General

#### Physical

Size	1 RU rack mount or tabletop; 260 mm deep FMS. Rack mounts included. 635 mm x 381 mm x 229 mm (25 in x 15 in x 9 in), shipping
Weight	2 kg (4.5 lbs), net 5.5 kg (12 lbs), shipping
Antenna	0.75 in pipe (1 in - 14 marine) thread Cable Connection: F-type 80 mm hex (across flats) x 84 mm (3.2 in x 3.3 in) Weight: 170 g (6.0 oz)
Antenna Cable	RG-6 type, 15 m (50 ft) provided Weight: 0.69 kg (1.52 lbs) per 15 m

#### Environmental

Temperature	Operating: 0 °C to + 50 °C (- 20 °C to + 70 °C typical) Nonoperating: - 40 °C to + 85 °C
Humidity	Noncondensing
EMC	Radiated susceptibility: passes walkie-talkie test Conducted emissions: power supply complies with FCC 20780, Class A and VDE 0871/6.78 Class A Surge withstand capability (SWC), power inlet: designed to meet ANSI/IEEE C37.90-1 and IEC 801-4

### Certifications and Approvals

CE mark/label and certificate

## Model 1094B Specifications

### Options

#### Power Options (select only one)

<u>Option Description</u>	<u>Order No.</u>
IEC-320 Power Inlet, 85 Vac to 264 Vac, 110 Vdc to 370 Vdc	1094opt07
Terminal Power Strip, Surge Withstand, 10 Vdc to 60 Vdc	1094opt08
Terminal Power Strip, Surge Withstand, 85 Vac to 250 Vac, 110 Vdc to 350 Vdc	1094opt10

### Cordset and Plug Styles

The following are the available IEC-320 mating cordset plug style and specifications:

<u>No.</u>	<u>Country</u>	<u>Specification</u>	<u>Rating</u>
P01	Continental Europe	CEE 7/7	220V
P02	Australia/NZ/PRC	AS 3112-1981	240V
P03	U.K.	BS 1363	240V
P04	Denmark	Afsnit 107-2-01	240V
P05	India	BS 546	220V
P06	Israel	SI 32	220V
P07	Italy	CEI 23-16/II 1971	220V
P08	Switzerland	SEV 1011.1959	220V
P09	North America and ROC	NEMA 5-15P CSA C22.2 #42	120V
P10	Japan	JIS8303	120V

### Accessories

#### Included

<u>Description</u>	<u>Order No.</u>
GPS Antenna, pipe mountable	AS0087800
15 m (50 ft) Antenna Cable	CA0021315
19 in Rack Mount Kit	AS0028200
Quick Setup Guide	PD0052800
Power Cord (with Option 07)	P09

#### Available

<u>Description</u>	<u>Order No.</u>
Power Cord	P01-P10
Operation Manual	AS0083400
15 m (50 ft) RG-6 Antenna Cable	CA0021315
30 m (100 ft) RG-6 Antenna Cable	CA0021330
45 m (150 ft) RG-6 Antenna Cable	CA0021345
60 m (200 ft) RG-6 Antenna Cable	CA0021360
75 m (250 ft) RG-6 Antenna Cable	CA0021375
GPS Antenna Mounting Kit	AS0044600
21 dB In-Line Preampfier <sup>1</sup>	AS0044700
Antenna Grounding Block Kit	AS0048900
GPS Surge Protector	AS0094500
GPS Antenna Cable Splitter	AP0013400
BNC (Male) Breakout to 100 mm Wires	AP0003400
BNC (Female) Breakout to 100 mm Wires	AP0008900
300 m (1000 ft) Roll RG-6 Cable	WC0005000
RG-6 Stripping Tool	TF0013200
RG-6 Type F Crimp Tool	TF0006400
RG-6 Type F Male Crimp-on Connector	CN0027700
300 m (1000 ft) Roll RG-11 Cable	WC0004900
RG-11 Stripping Tool	TF0013300
RG-11 Type F Crimp Tool	TF0006000
RG-11 Type F Male Crimp-on Connector	CN0027800
19 in Rack Slide Kit	AS0033100
24 in Rack Mount Kit	AS0056600

<sup>1</sup> For use with cable lengths greater than 75 m (250 ft)